



FS230 is used as an intermediate piece for 1/2" beveled profile installations.

Available in a range of colors. Pantone Match Color Available. (Lead times & minimum quantities apply)

This Track is perfect for use with our Fabric Wall Finishing System. Combined with our ReCore® Backing and Fabric, this track can be used to create anything from full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall-Protection.




TRACK FEATURES

Height	Edge Profile	Load Direction	Seam Usage	Edge Usage	Other
<div>1/2" THICK</div>	<div>BEVELED</div>	<div>FRONT</div>	<div>YES</div>	<div>NO</div>	<div>CURVABLE</div>

FS230 Track


Data Sheet

Color	Natural	<p>Since FS280 is completely hidden when installed, we offer it in Natural only.</p> <p>Pantone Match Colors are available but extended lead times and minimum quantities apply.</p>
Part #	FS230-NAT	



Track Features		Feature Description
Height	1/2"	Half-Inch Track has minimal protrusion and is ideal for Graphic Wall Panels, Wall Protection, Tackable Wall Finishing
Edge Profile	Beveled	A Beveled Edge Profile has a sophisticated taper, that eases the edges and seams together.
Load	Front-Loading	FS200's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc.
Usage	Intermediate	Used as an intermediate (mid-wall) track with any 1/2 inch substrate to create a seam between two panels.
Other	Curvable	Can be easily modified on-site to create curved joints

TECHNICAL CUTAWAY

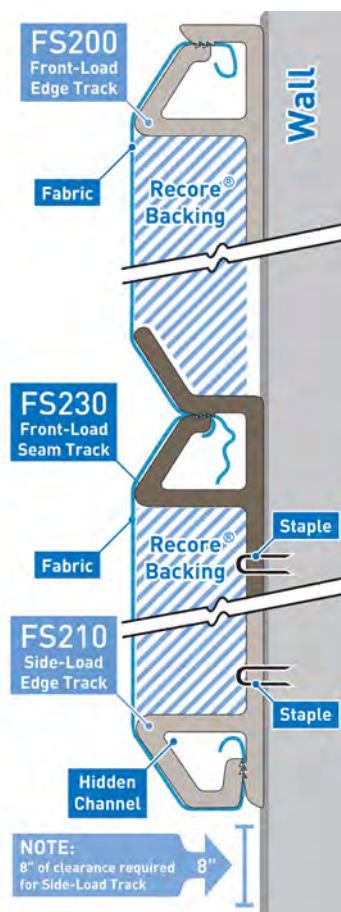

FS230 SPECIFICATIONS

Description	Durable PVC Track for use in Fabric Wall Finishing
Sold In	5' Lengths
Installation	Mountable with <ul style="list-style-type: none"> • Drywall Screws • 18 Gauge 1/4" Full-Crown Staples • Adhesive
Customization	Easily cut with: <ul style="list-style-type: none"> • FS830-001 Chamfer Cutter Tool • 180 Tooth 10" Plastic Weight Chop Saw
Composition	100 % Durable PVC
Dimensions	5' x 0.5" x 0.75"
Weight	0.56 lb per 5' stick
Disposal	Fully Recyclable
Handling	Safe To Handle
Fire Rating	ASTM E84 Class A
VOC's	< 0.1%