

FS105



## SQUARE FRONT-LOAD LOW-LEG FABRIC MOUNTING FRAME

**FABRICMATE**  
WALL FINISHING SOLUTIONS








Acoustic &amp; Tackable Installation in Office

FS105 is a Low-Leg Frame used as a perimeter where limited Frame visibility is desired. The Frame jaws are recessed, resulting in less visibility. Frame will still be slightly visible in most cases and we do offer custom colors, textures, and styles. Combined with our ReCore® Backing and Fabric, this Frame


can be used (in combination with our seam-friendly Frames) to create anything from full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall Protection. Use our Flex-Frame for creating curved designs or installing on rounded surfaces.

### FS105 FRAME FEATURES


HEIGHT

EDGE  
PROFILELOAD  
DIRECTIONSEAM  
USAGEEDGE  
USAGE

CURVABLE



100% uPVC | CRUSH PROOF | FULLY RECYCLABLE | FLEXIBLE | EASILY CUSTOMIZABLE | SAFE TO HANDLE

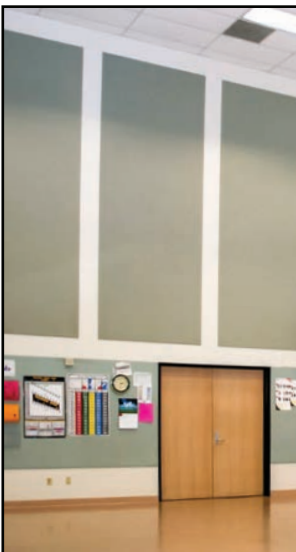

Acoustics &amp; Tackability in School Gym



Acoustics and Wall Protection in School (FS105 &amp; FS100 Used)




Graphics and Acoustics in Office

## FS105 - 1/2" SQUARE LOW-LEG


ACOUSTICS | TACKABILITY | WALL PROTECTION | GRAPHICS

Elevate your style with our Deco-Frame® options. Available in multiple looks and styles (some examples below), these custom edges really push your installation to the next level. Also available in Natural and other colors and styles or can be customized for the ultimate personalized look and feel.

Color & location of edge designs may vary from those depicted below.




FS105 Profile (Actual Size)



Black



White




Brushed Aluminum




Wood Grain

FS105 FRAME FEATURES		FEATURE DESCRIPTION
Height	1/2"	Half-Inch Frame has minimal protrusion and is ideal for Graphic Wall Panels, Wall Protection, and Tackable Wall Finishing
Edge Profile	Square	The square profile produces clean, crisp joints and edges
Load	Front-Load	FS105's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc
Seam Usage	No	FS105 cannot be used to create seams or joints
Edge Usage	Yes	FS105 can be used as a perimeter with any 1/2" substrate
Other	Curvable	We offer our curvable Flex-Frame (SKU: KF105) or FS105 can be easily modified on-site to create curved joints

### FS105 TECHNICAL CUTAWAY

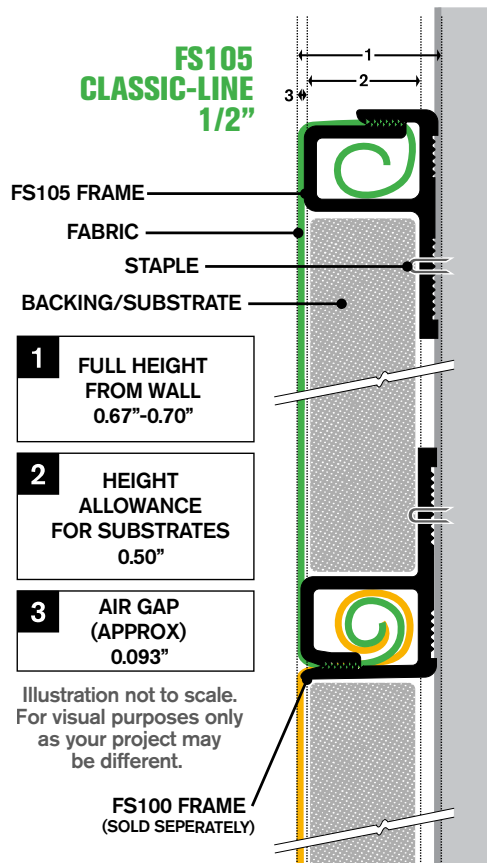

### FS105 SPECIFICATIONS

<b>Description</b>	Durable uPVC Track for use in Fabric Wall Finishing
<b>Sold In</b>	5' Lengths
<b>Installation</b>	Mountable with <ul style="list-style-type: none"> <li>18 Gauge 1/4" Narrow-Crown Staples</li> <li>Drywall Screws</li> <li>Staples &amp; Adhesive (Liquid Nails or PL200 Recommended)</li> </ul>
<b>Customization</b>	Easily cut with: <ul style="list-style-type: none"> <li>Fabricmate® Chamfer Cutters</li> <li>180 Tooth 10" Plastic Weight Chop Saw</li> </ul>
<b>Composition</b>	 100% Durable uPVC (No Phthalates or BPA, Does not decompose, is weather-resistant)
<b>Dimensions</b>	5' x 0.68" x 0.75"
<b>Weight</b>	0.6 lb per 5' stick
<b>Disposal</b>	Fully Recyclable
<b>Handling</b>	Safe To Handle
<b>Fire Rating</b>	ASTM E84 Class A
<b>VOC's</b>	< 0.1%

**FABRICMATE®**  
WALL FINISHING SOLUTIONS

2781 Golf Course Drive, Unit A  
Ventura, CA 93003  
805-642-7470  
fabricmate.com