

FS280
1" BEVELED INTERMEDIATE FRONT-LOAD
 FABRIC MOUNTING FRAME


FABRICMATE
 WALL FINISHING SOLUTIONS


Curvable FS280 Flex-Frame in Beach Bedroom


FS280 is used as an intermediate/seam piece for 1" profile installations. It provides both the required bevels for intermediate joints and seams. Its centered, front-loading design allows fast and easy placement of fabric from two adjoining panels. It is only suitable for

use as an intermediate piece but can be used with any of our other 1" Frames. The FS280 Frame is only available in natural color since it is fully covered by fabric and is not visible. Creates a stylish beveled appearance for custom inerts and seam/intermediate joints.

FS280 FRAME FEATURES

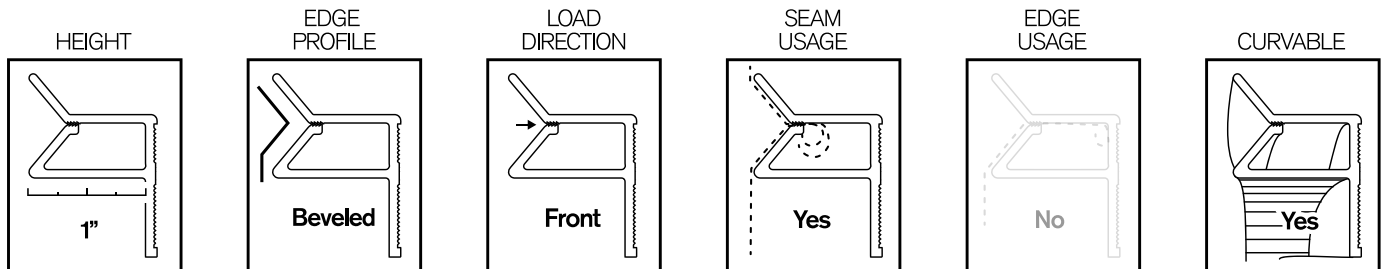
100% uPVC | CRUSH PROOF | FULLY RECYCLABLE | FLEXIBLE | EASILY CUSTOMIZABLE | SAFE TO HANDLE



FS280 Frame installed in Home Theater

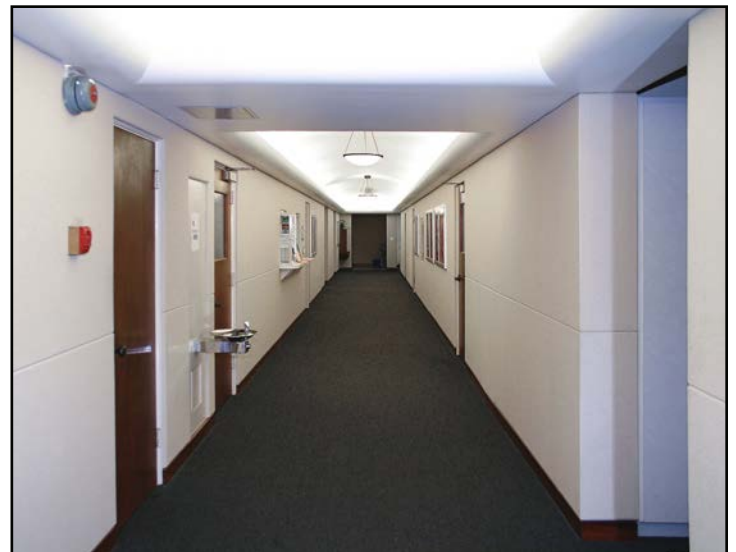


FS280 in Business Hallway

FS280 - 1" BEVELED INTERMEDIATE


ACOUSTICS | WALL PROTECTION | TACKABILITY | GRAPHICS

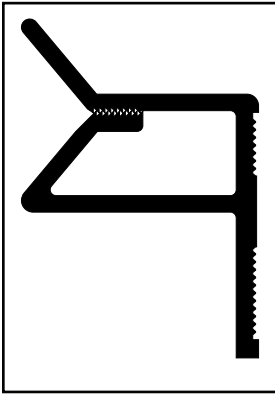


FS280 Profile (Actual Size)

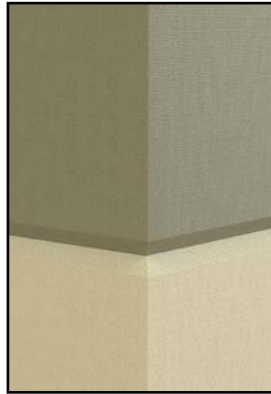

Looks great around corners

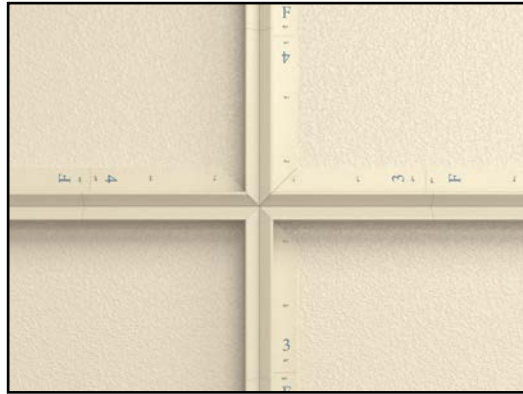


Cross Seam with FS280

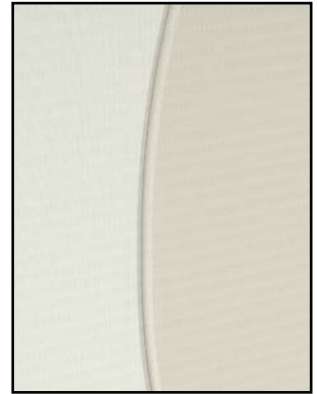


Curvable Flex-Frame with FS280

| FS280 FRAME FEATURES | | FEATURE DESCRIPTION |
|----------------------|------------|--|
| Height | 1" | One-Inch Frame is ideal for acoustic applications, offering excellent sound absorbency, tackability, and wall protection |
| Edge Profile | Beveled | A Beveled Edge Profile has a sophisticated taper that eases edges and seams together |
| Load | Front-Load | FS280's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc |
| Seam Usage | Yes | FS280 is used to create seams or joints with any 1" substrate |
| Edge Usage | No | FS280 cannot be used as a perimeter with any 1" substrate |
| Other | Curvable | We offer our curvable Flex-Frame (SKU: KF280) or FS280 can be easily modified on-site to create curved joints |

FS280 TECHNICAL CUTAWAY

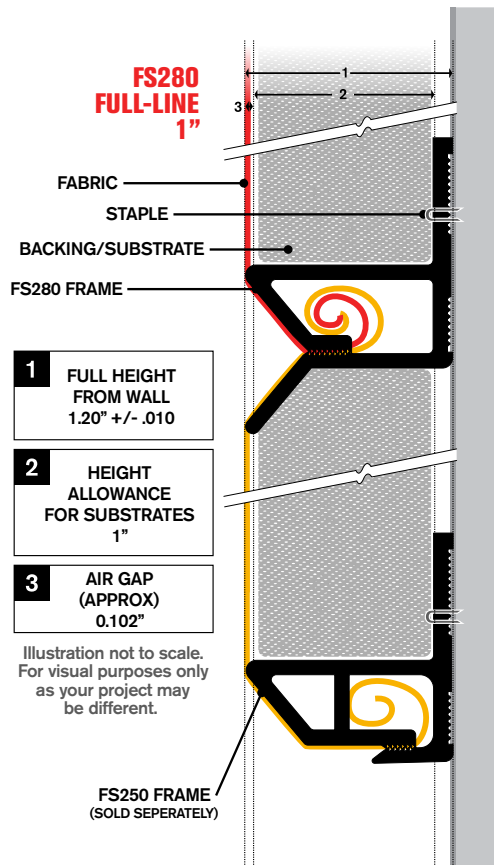

FS280 SPECIFICATIONS

| | |
|----------------------|--|
| Description | Durable uPVC Track for use in Fabric Wall Finishing |
| Sold In | 5' Lengths |
| Installation | Mountable with <ul style="list-style-type: none"> Drywall Screws 18 Gauge 1/4" Narrow-Crown Staples Adhesive |
| Customization | Easily cut with: <ul style="list-style-type: none"> Fabricmate® Chamfer Cutters 180 Tooth 10" Plastic Weight Chop Saw |
| Composition |  100% Durable uPVC (No Phthalates or BPA, Does not decompose, is weather-resistant) |
| Dimensions | 5' x 1.205" x 0.625" |
| Weight | 1.22 lb per 5' stick |
| Disposal | Fully Recyclable |
| Handling | Safe To Handle |
| Fire Rating | ASTM E84 Class A |
| VOC's | < 0.1% |