

FS155



SQUARE FRONT-LOAD LOW-LEG FABRIC MOUNTING FRAME

FABRICMATE
WALL FINISHING SOLUTIONS



Aesthetics, Acoustics, and Wall Protection in Hallway

FS155 is a Low-Leg Frame used as a perimeter piece for 1" where limited Frame visibility is desired. The Frame jaws are recessed, resulting in less visibility. Frame will still be slightly visible in most cases and we do offer custom colors, textures, and styles. Combined with our ReCore® Backing and

Fabric, this Frame can be used in combination with FS150 (for seams) to create anything from full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall Protection. Use our Flex-Frame for creating curved designs or installing on rounded surfaces.

FS155 FRAME FEATURES

HEIGHT	EDGE PROFILE	LOAD DIRECTION	SEAM USAGE	EDGE USAGE	CURVABLE
 1"	 Square	 Front	 No	 Yes	 Yes

100% uPVC | CRUSH PROOF | FULLY RECYCLABLE | FLEXIBLE | EASILY CUSTOMIZABLE | SAFE TO HANDLE



Acoustics and Aesthetics in Recording Studio (also uses FS150)




Acoustics, Aesthetics, and Wall Protection in Home Theater (also uses FS150)

FS155 - 1" SQUARE LOW-LEG

ACOUSTICS | WALL PROTECTION | TACKABILITY | GRAPHICS

Elevate your style with our Deco-Frame® options. Available in multiple looks and styles (some examples below), these custom edges really push your installation to the next level. Also available in Natural and other colors and styles or can be customized for the ultimate personalized look and feel.

Color & location of edge designs may vary from those depicted below.




FS155 Profile (Actual Size)



Black



White




Brushed Aluminum




Wood Grain

FS155 FRAME FEATURES		FEATURE DESCRIPTION
Height	1"	One-Inch Frame is ideal for acoustic applications, offering excellent sound absorbency, tackability, and wall protection
Edge Profile	Square	The square profile produces clean, crisp joints and edges
Load	Front-Load	FS155's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc
Seam Usage	No	FS155 cannot be used to create seams or joints
Edge Usage	Yes	FS155 can be used as a perimeter with any 1" substrate
Other	Curvable	We offer our curvable Flex-Frame (SKU: KF155) or FS155 can be easily modified on-site to create curved joints

FS155 TECHNICAL CUTAWAY

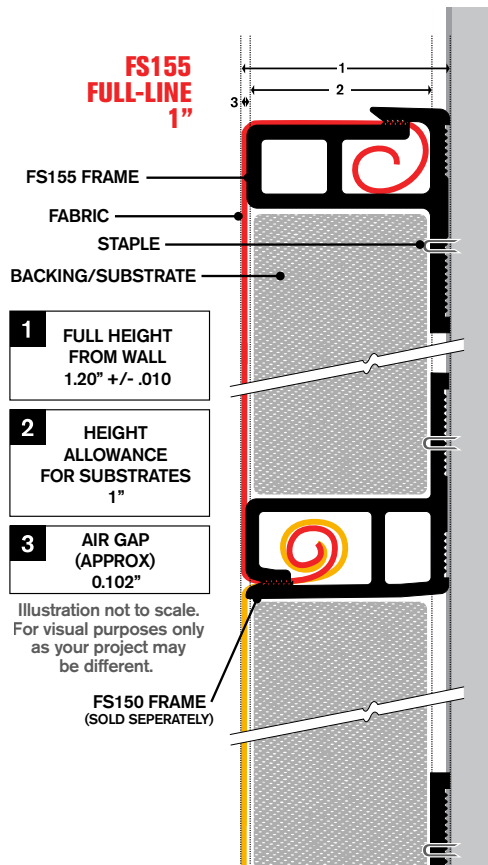

FS155 SPECIFICATIONS

Description	Durable uPVC Track for use in Fabric Wall Finishing
Sold In	5' Lengths
Installation	Mountable with <ul style="list-style-type: none"> 18 Gauge 1/4" Narrow-Crown Staples Drywall Screws Staples & Adhesive (Liquid Nails or PL200 Recommended)
Customization	Easily cut with: <ul style="list-style-type: none"> Fabricmate® Chamfer Cutters 180 Tooth 10" Plastic Weight Chop Saw
Composition	 100% Durable uPVC (No Phthalates or BPA, Does not decompose, is weather-resistant)
Dimensions	5' x 1.175" x 0.625"
Weight	1.2 lb per 5' stick
Disposal	Fully Recyclable
Handling	Safe To Handle
Fire Rating	ASTM E84 Class A
VOC's	< 0.1%