

FS230

BEVELED INTERMEDIATE FRONT-LOAD FABRIC MOUNTING FRAME

FABRICMATE
WALL FINISHING SOLUTIONS




Custom Installation in School


FS230 is used as an intermediate/seam piece for 1/2" beveled profile installations. It provides both the required bevels for intermediate joints and seams. Its centered, front-loading design allows fast and easy placement of fabric from two adjoining panels. It is only suitable for use

as an intermediate piece but can be used with any of our other 1/2" Frames. The FS230 Frame is only available in natural color since it is fully covered by fabric and is not visible. Creates a stylish beveled appearance for custom inerts and seam/intermediate joints


FS230 FRAME FEATURES

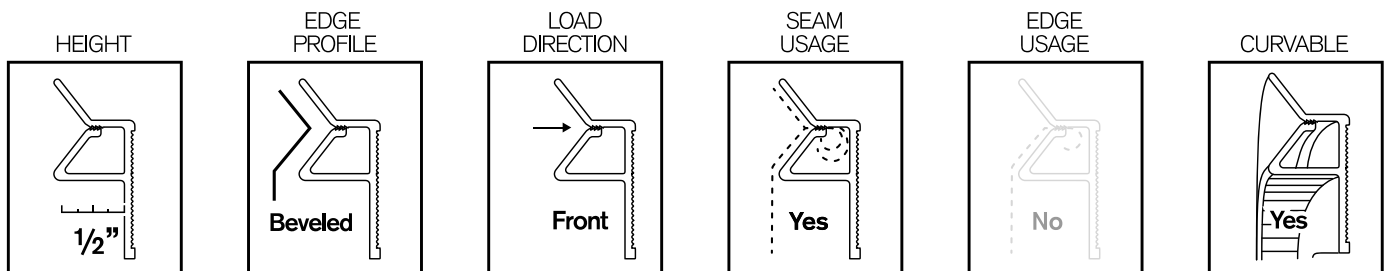

100% uPVC | CRUSH PROOF | FULLY RECYCLABLE | FLEXIBLE | EASILY CUSTOMIZABLE | SAFE TO HANDLE

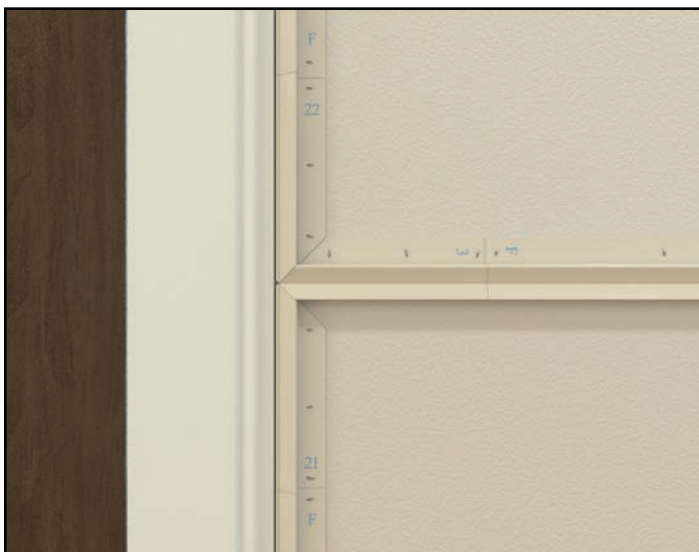


Intermediate Seam with Frame only (FS230 used against door frame edge)

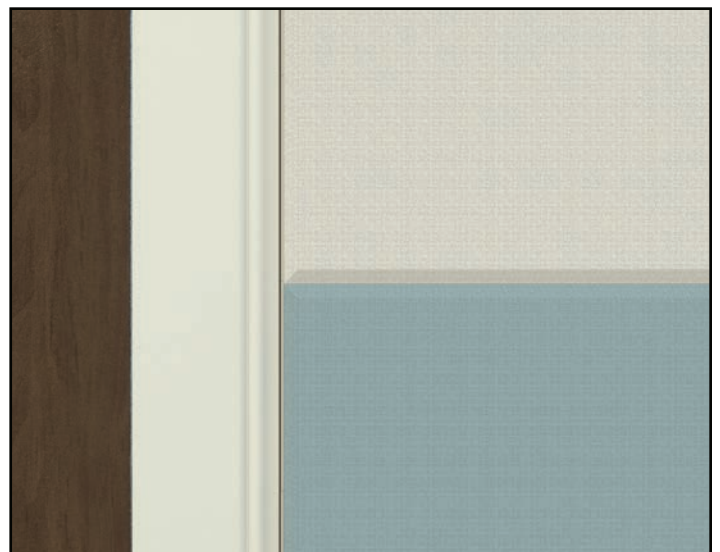

Completed Intermediate Seam (FS230 used against door frame edge)

FS230 - 1/2" BEVELED INTERMEDIATE FRONT-LOAD


ACOUSTICS | TACKABILITY | WALL PROTECTION

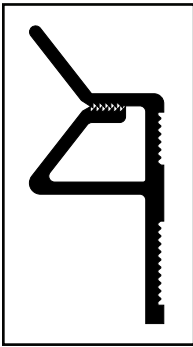


FS230 Profile (Actual Size)



Natural

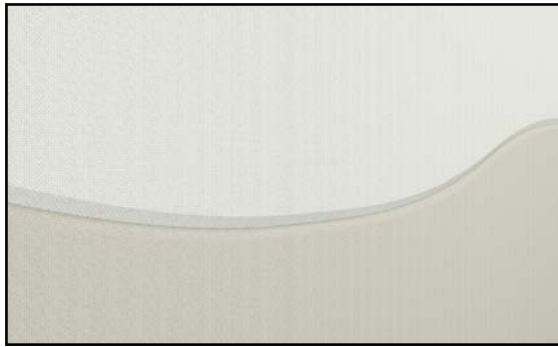


Horizontal Seam with FS230 Flex-Frame

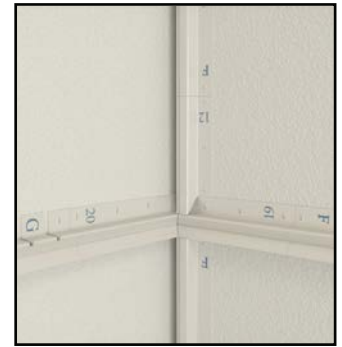


Inside Corner Cross Seam with FS230

FS230 FRAME FEATURES		FEATURE DESCRIPTION
Height	1/2"	Half-Inch Frame has minimal protrusion and is ideal for Graphic Wall Panels, Wall Protection, and Tackable Wall Finishing
Edge Profile	Beveled	A Beveled Edge Profile has a sophisticated taper that eases edges and seams together
Load	Front-Load	FS230's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc
Seam Usage	Yes	FS230 is used to create seams or joints with any 1/2" substrate
Edge Usage	No	FS230 cannot be used as a perimeter with any 1/2" substrate
Other	Curvable	We offer our curvable Flex-Frame (SKU: KF230) or FS230 can be easily modified on-site to create curved joints

FS230 TECHNICAL CUTAWAY

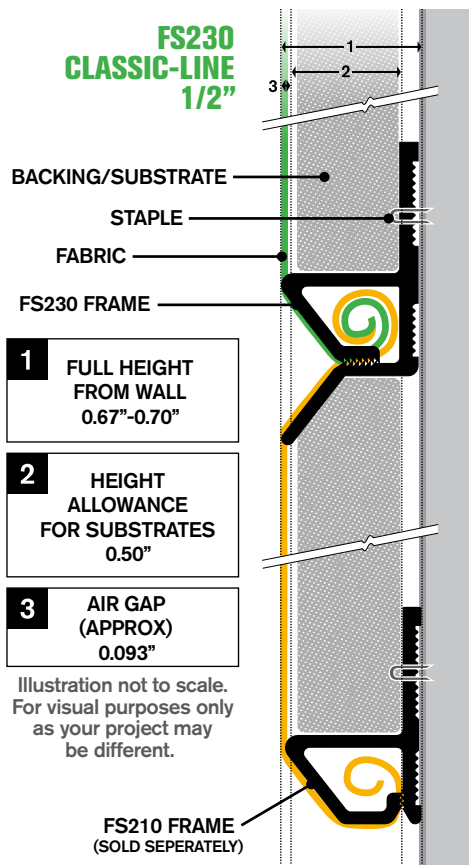

FS230 SPECIFICATIONS

Description	Durable uPVC Track for use in Fabric Wall Finishing
Sold In	5' Lengths
Installation	Mountable with <ul style="list-style-type: none"> Drywall Screws 18 Gauge 1/4" Narrow-Crown Staples Adhesive
Customization	Easily cut with: <ul style="list-style-type: none"> Fabricmate® Chamfer Cutters 180 Tooth 10" Plastic Weight Chop Saw
Composition	 100% Durable uPVC (No Phthalates or BPA, Does not decompose, is weather-resistant)
Dimensions	5' x 0.68" x 0.75"
Weight	0.56 lb per 5' stick
Disposal	Fully Recyclable
Handling	Safe To Handle
Fire Rating	ASTM E84 Class A
VOC's	< 0.1%