

FS110


SQUARE SIDE-LOAD
 FABRIC MOUNTING FRAME

FABRICMATE[®]
 WALL FINISHING SOLUTIONS



Wall Protection Wainscoting Panels in Hotel

FS110 is our most popular option for applications where less frame visibility is desired. The fabric wraps around the Frame leaving virtually no visible edge. FS110 can be used as a perimeter piece for 1/2" square profile installations and is perfect for use with our Fabric Wall Finishing System. Combined with our ReCore[®] Backing and Fabric, this Frame can be used to create anything from


full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall Protection. Use our Flex-Frame for creating curved designs or installing on rounded surfaces. Due to its design, FS110 needs a clearance of 8" from walls and ceilings to allow for installation of fabric. It can be combined with our other Frame profiles where seams are desired.

FS110 FRAME FEATURES


HEIGHT




EDGE PROFILE




LOAD DIRECTION




SEAM USAGE



EDGE USAGE




CURVABLE


100% uPVC | CRUSH PROOF | FULLY RECYCLABLE | FLEXIBLE | EASILY CUSTOMIZABLE | SAFE TO HANDLE


Can be used to create curved layouts




Tackable Installation in Office

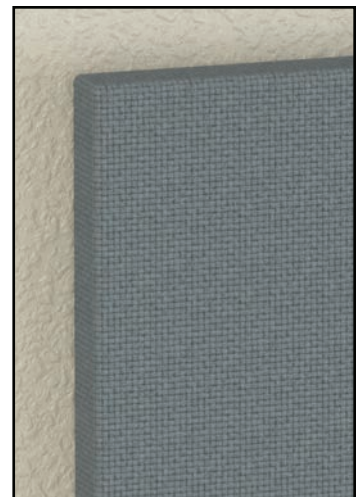

Close Up/Detail of FS110 Panel

FS110 - 1/2" SQUARE SIDE-LOAD

ACOUSTICS | TACKABILITY | WALL PROTECTION | GRAPHICS

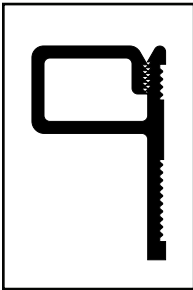


FS110 Profile (Actual Size)



Natural




Acoustic Panel in Bedroom

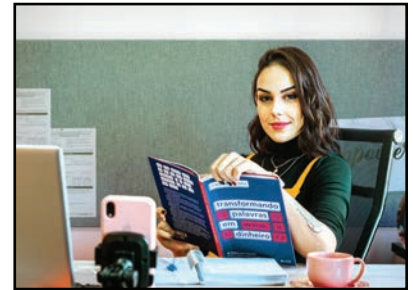


Tackable Panel in Home Office

FS110 FRAME FEATURES		FEATURE DESCRIPTION
Height	1/2"	Half-Inch Frame has minimal protrusion and is ideal for Acoustics, Tackability, Wall Protection, and Graphics
Edge Profile	Square	The square profile produces clean, crisp joints and edges
Load	Side-Load	FS110's side loading feature allows for a panel to be fully wrapped with very minimal (if any) frame showing
Seam Usage	No	FS110 cannot be used to create seams or joints
Edge Usage	Yes	FS110 can be used as a perimeter with any 1/2" substrate with 8" of clearance needed to install
Other	Curvable	We offer our curvable Flex-Frame (SKU: KF110) or FS110 can be easily modified on-site to create curved joints

FS110 TECHNICAL CUTAWAY

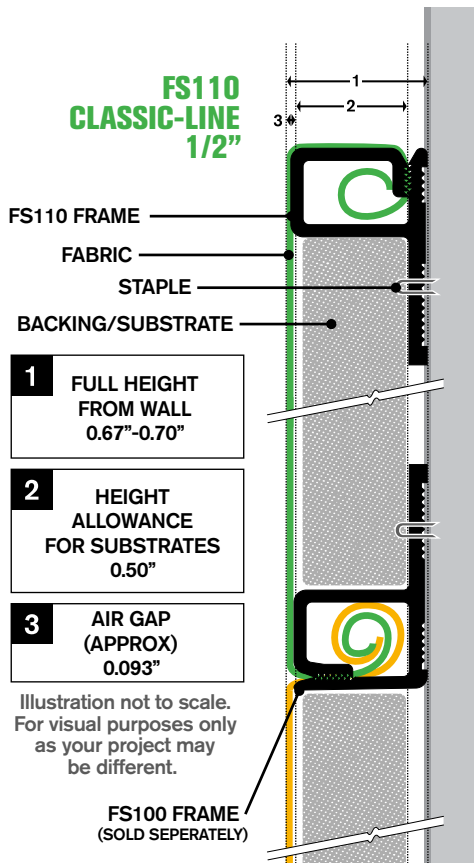

FS110 SPECIFICATIONS

Description	Durable uPVC Track for use in Fabric Wall Finishing
Sold In	5' Lengths
Installation	Mountable with <ul style="list-style-type: none"> 18 Gauge 1/4" Narrow-Crown Staples Drywall Screws Staples & Adhesive (Liquid Nails or PL200 Recommended)
Customization	Easily cut with: <ul style="list-style-type: none"> Fabricmate® Chamfer Cutters 180 Tooth 10" Plastic Weight Chop Saw
Composition	 100% Durable uPVC (No Phthalates or BPA, Does not decompose, is weather-resistant)
Dimensions	5' x 0.64" x 0.75"
Weight	0.56 lb per 5' stick
Disposal	Fully Recyclable
Handling	Safe To Handle
Fire Rating	ASTM E84 Class A
VOC's	< 0.1%

FABRICMATE
WALL FINISHING SOLUTIONS

2781 Golf Course Drive, Unit A
Ventura, CA 93003
805-642-7470
fabricmate.com