



The Max-Line System allows for 2", 3" and 4" thick wall-finishing for maximum noise reduction and acoustical absorbency.

Max-Line Expanders come in 2", 3" and 4" thicknesses with variants for Side-Load and Front-Load installations.

The Max-Line expander profiles are designed to be used with our Classic-Line profiles in a wide range of configurations to meet your needs.







Max-Line can be mounted with screws through the anchor holes or with staples in the included flange leg.



Pre-drilled Pocket holes allow for the fast and easy anchoring to drywall, other options are available for concrete or special surface mounting.

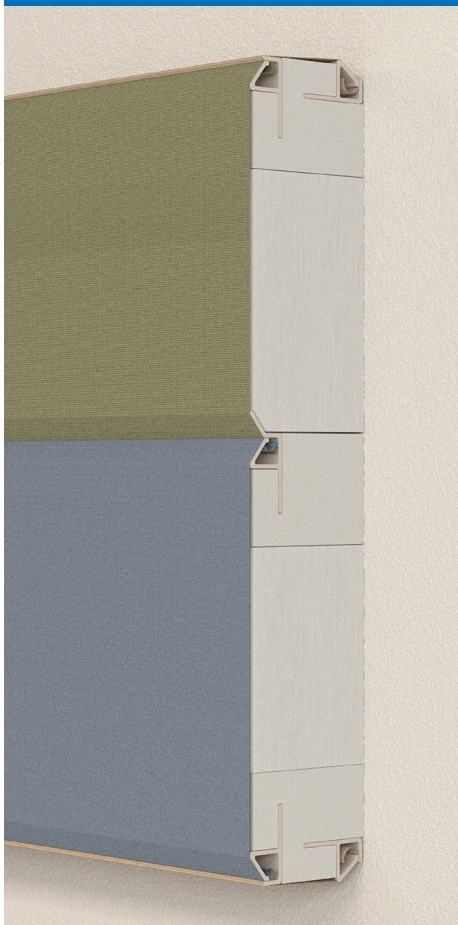


Max-Line FS200 is built to accommodate Beveled Front-Load Frame in Top & Side-Load positions.

Profile	Front-Load Beveled 2"	Front/Side Beveled 2"	Front-Load Beveled 3"	Front/Side Load Beveled 3"	Front-Load Beveled 4"	Front/Side Beveled 4"
						

Features		Feature Description
<b>Height</b>	2", 3" or 4"	Max-Line comes in 2", 3" & 4" Variations
<b>Edge Profile</b>	Variable	Max-Line Expander uses FS200 Frame to create beveled edges.
<b>Usage</b>	Edge & Joint	Max-Line FS200 Expander is to be used as perimeter piece and or intermediate seams.
<b>Other</b>	Curvable	Max-Line can be easily modified on-site to create curved joints.

## CUTAWAY



## SPECIFICATIONS

<b>Description</b>	Classic-Line beveled with Max-Line Expander
<b>Sold In</b>	5' Lengths or custom lengths up to 10'
<b>Installation</b>	Mountable with <ul style="list-style-type: none"> <li>• Drywall Screws</li> <li>• 18 Gauge 1/4" Full-Crown Staples</li> <li>• Adhesive</li> </ul>
<b>Customization</b>	Easily cut with: <ul style="list-style-type: none"> <li>• 180 Tooth 10" Plastic or Fine-Tooth Blade</li> </ul>
<b>Composition</b>	PVC
<b>Dimensions</b>	5' x 2" x 1.5"   5' x 3" x 1.5"   5' x 4" x 1.5"
<b>Weight</b>	~ 0.9 - 1.6 lbs/ft. based on configuration
<b>Disposal</b>	Fully Recyclable
<b>Handling</b>	Safe to Handle
<b>Fire Rating</b>	Class A