

FS160 can be used as a perimeter piece for 1" square profile installations where the fabric needs to wrap around the edge. Available in a range of colors. Pantone Match Color Available. (Lead times & minimum quantities apply)

This Track is perfect for use with our Fabric Wall Finishing System. Combined with our ReCore® Backing and Fabric, this track can be used to create anything from full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall-Protection.



FS160 EDGE & JOINT ON SAMPLE PANEL
BEEHAVE & ANCHORAGE FABRIC SHOWN



FS160 EDGE & JOINT ON SAMPLE PANEL
FS160-NAT (NATURAL) & FS150-NAT (NATURAL) SHOWN


TRACK FEATURES

Height	Edge Profile	Load Direction	Seam Usage	Edge Usage	Other
<p>1" THICK</p>	<p>SQUARE</p>	<p>SIDE</p>	<p>NO</p>	<p>YES</p>	NONE

Color	Natural
Part #	FS160-NAT

Since FS160 is completely hidden when installed, we offer it in Natural only.


Pantone Match Colors are available but extended lead times and minimum quantities apply.



Track Features		Feature Description
Height	1"	One-Inch Track is ideal for acoustic applications, offering excellent sound absorbency, tackability and wall-protection.
Edge Profile	Square	The square profile produces clean, crisp joints and edges.
Load	Side-Loading	Side-Loading Track hiding the jaw against the wall and wraps the fabric around the face and edge of the panel. <i>8 Inches of clearance is required for all Side-Loading Track to allow room for inserting the fabric with the roller or rocker tool</i>
Usage	Edge	Used as a perimeter track with any 1 inch substrate.

TECHNICAL CUTAWAY

FS160 SPECIFICATIONS

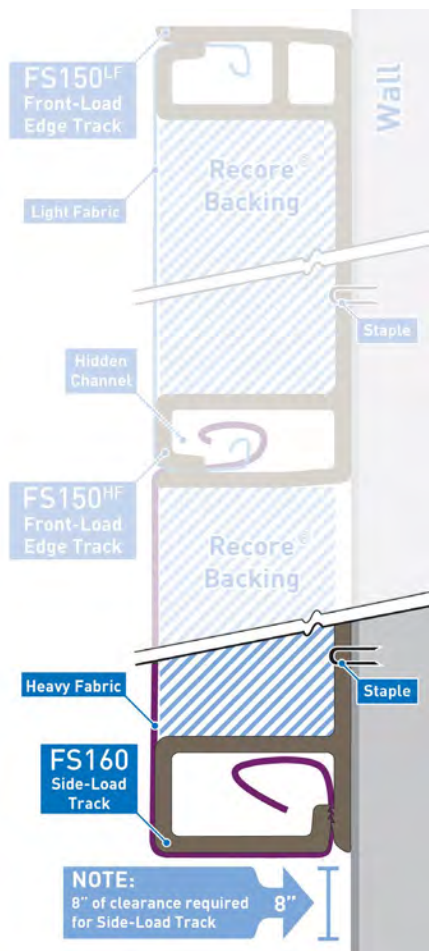

- Description** Durable PVC Track for use in Fabric Wall Finishing
- Sold In** 5' Lengths
- Installation** Mountable with
 - Drywall Screws
 - 18 Gauge 1/4" Full-Crown Staples
 - Adhesive
- Customization** Easily cut with:
 - 180 Tooth 10" Plastic Weight Chop Saw
- Composition** 100 % Durable PVC
- Dimensions** 5' x 1" x .625"
- Weight** 1 lb per 5' stick
- Disposal** Fully Recyclable
- Handling** Safe To Handle
- Fire Rating** ASTM E84 Class A
- VOC's** < 0.1%