Data Sheet





FS250 is a very popular track. It is used as a perimeter piece for 1" beveled profile fabric covered wall finishing installations. Available in a range of colors. Pantone Match Color Available. (Lead times & minimum quantities apply)

This Track is perfect for use with our Fabric Wall Finishing System. Combined with our ReCore® Backing and Fabric, this track can be used to create anything from full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall-Protection.






TRACK FEATURES


Height	Edge Profile	Load Direction	Seam Usage	Edge Usage	Other
= 1	7	Ţ	1111	++++	
1" THICK	BEVELED	FRONT	NO	YES	NONE

FS250 Track Data Sheet

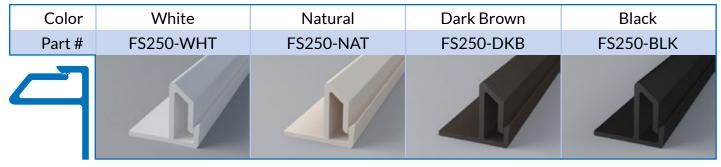

Track Features		Feature Description	
Height	1"	One-Inch Track is ideal for Acoustic applications, offering excellent sound absorbency, tackability and wall-protection.	
Edge Profile	Beveled	A Beveled Edge Profile has a sophisticated taper, that eases the edges and seams together.	
Load	Front-Loading	FS200's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc.	
Usage	Edge	Can be used as a perimeter track with any 1 inch substrate.	

TECHNICAL CUTAWAY

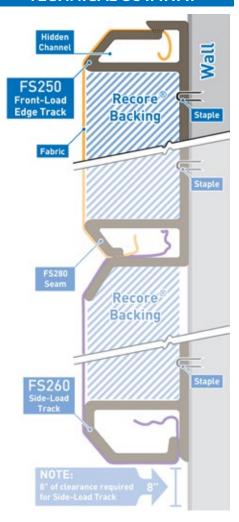

FS250 SPECIFICATIONS

Description Durable PVC Track for use in Fabric Wall Finishing

Sold In 5' Lengths

Installation Mountable with

• Drywall Screws

• 18 Gauge 1/4" Full-Crown Staples

• Adhesive

Customization Easily cut with:

• FS830-001 Chamfer Cutter Tool

• 180 Tooth 10" Plastic Weight Chop Saw

Composition 100 % Durable PVC

Dimensions $5' \times 1'' \times 0.75''$

Weight 1 lb per 5' stick

Disposal Fully Recyclable

Handling Safe To Handle

Fire Rating ASTM E84 Class A

VOC's < 0.1%

