

FS100



SQUARE FRONT-LOAD FABRIC MOUNTING FRAME

FABRICMATE
WALL FINISHING SOLUTIONS




Acoustics & Tackability in Classrooms

FS100 is our most popular Frame and can be used both as a perimeter and an intermediate piece for 1/2" square profile installations and as an inside corner piece for all 1/2" installations. This Frame is perfect for use with our Fabric Wall Finishing System. Combined with our ReCore®


Backing and Fabric, this Frame can be used to create anything from full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall Protection. Use our Flex-Frame for creating curved designs or installing on rounded surfaces.

FS100 FRAME FEATURES


HEIGHT




EDGE
PROFILE




LOAD
DIRECTION




SEAM
USAGE




EDGE
USAGE



CURVABLE




100% uPVC | CRUSH PROOF | FULLY RECYCLABLE | FLEXIBLE | EASILY CUSTOMIZABLE | SAFE TO HANDLE

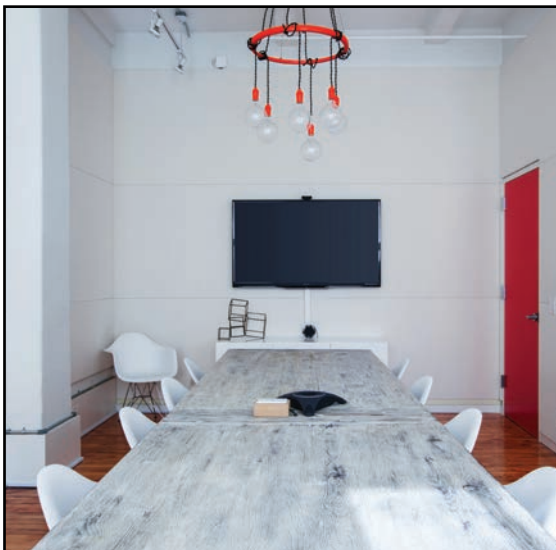

Acoustics & Aesthetics in Conference Rooms



Acoustics - Custom Geometric in Auditorium

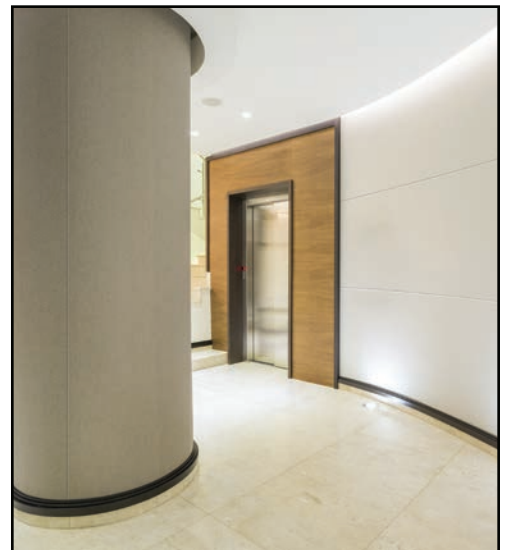


Acoustics & Wall Protection in Curved Hallway

FS100 - 1/2" SQUARE FRONT-LOAD


ACOUSTICS | TACKABILITY | WALL PROTECTION | GRAPHICS

Elevate your style with our Deco-Frame® options. Available in multiple looks and styles (some examples below), these custom edges really push your installation to the next level. Also available in Natural and other colors and styles or can be customized for the ultimate personalized look and feel.


Color & location of edge designs may vary from those depicted below.

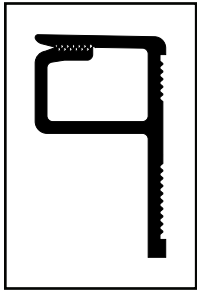


FS100 Profile (Actual Size)



Black



White




Brushed Aluminum




Wood Grain

FS100 FRAME FEATURES		FEATURE DESCRIPTION
Height	1/2"	Half-Inch Frame has minimal protrusion and is ideal for Acoustics, Tackability, Wall Protection, and Graphics
Edge Profile	Square	The square profile produces clean, crisp joints and edges
Load	Front-Load	FS100's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc
Seam Usage	Yes	FS100 can be used to create seams or joints with any 1/2" substrate
Edge Usage	Yes	FS100 can be used as a perimeter with any 1/2" substrate
Other	Curvable	We offer our curvable Flex-Frame (SKU: KF100) or FS100 can be easily modified on-site to create curved joints

FS100 TECHNICAL CUTAWAY

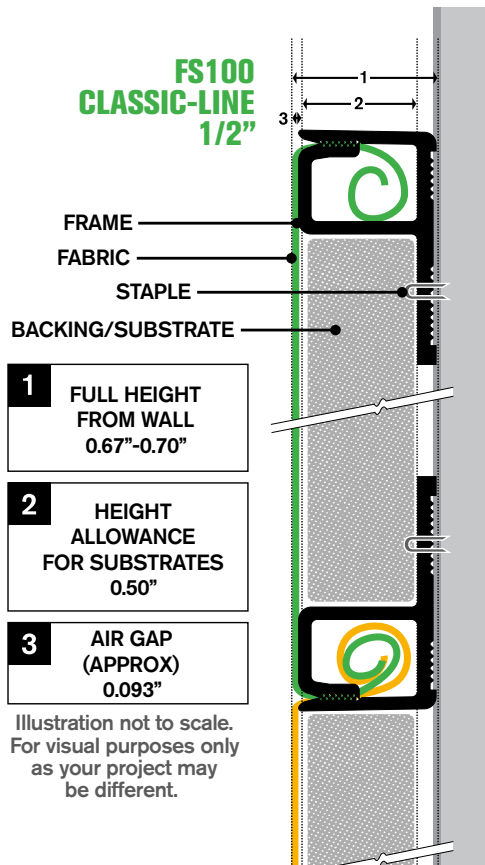

FS100 SPECIFICATIONS

Description	Durable uPVC Track for use in Fabric Wall Finishing
Sold In	5' Lengths
Installation	Mountable with <ul style="list-style-type: none"> 18 Gauge 1/4" Narrow-Crown Staples Drywall Screws Staples & Adhesive (Liquid Nails or PL200 Recommended)
Customization	Easily cut with: <ul style="list-style-type: none"> Fabricmate® Chamfer Cutters 180 Tooth 10" Plastic Weight Chop Saw
Composition	 100% Durable uPVC (No Phthalates or BPA, Does not decompose, is weather-resistant)
Dimensions	5' x 0.68" x 0.75"
Weight	0.6 lb per 5' stick
Disposal	Fully Recyclable
Handling	Safe To Handle
Fire Rating	ASTM E84 Class A
VOC's	< 0.1%

FABRICMATE®
WALL FINISHING SOLUTIONS

2781 Golf Course Drive, Unit A
Ventura, CA 93003
805-642-7470
fabricmate.com