




FS200 is a very popular track. It is used as a perimeter piece for 1/2" beveled profile fabric covered wall finishing installations. Available in a range of colors. Pantone Match Color Available. (Lead times & minimum quantities apply)

This Track is perfect for use with our Fabric Wall Finishing System. Combined with our ReCore® Backing and Fabric, this track can be used to create anything from full-wall photographic murals to smaller acoustic or bulletin-board panels as well as Wainscoting and other types of Wall-Protection.








FS230 JOINT & FS200 EDGE ON SAMPLE PANEL
BEEHAVE & ANCHORAGE FABRIC SHOWN

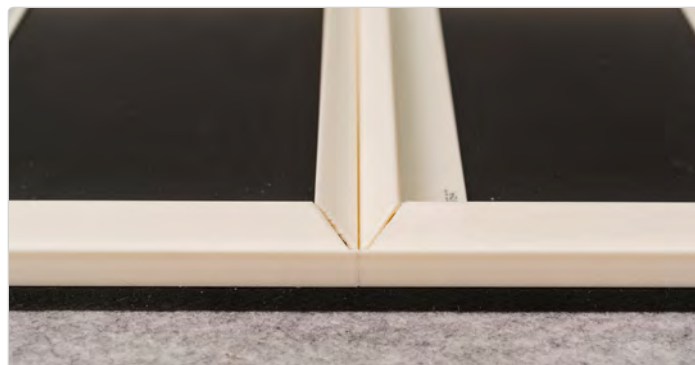

FS230 JOINT & FS200 EDGE ON SAMPLE PANEL
FS230-NAT (NATURAL) & FS200-NAT (NATURAL) SHOWN


TRACK FEATURES

Height	Edge Profile	Load Direction	Seam Usage	Edge Usage	Other
<p>1/2" THICK</p>	<p>BEVELED</p>	<p>FRONT</p>	<p>NO</p>	<p>YES</p>	NONE

Color	White	Natural	Dark Brown	Black
Part #	FS200-WHT	FS200-NAT	FS200-DKB	FS200-BLK
				

Track Features		Feature Description
Height	1/2"	Half-Inch Track has minimal protrusion and is ideal for Graphic Wall Panels, Wall Protection, Tackable Wall Finishing
Edge Profile	Beveled	A Beveled Edge Profile has a sophisticated taper, that eases the edges and seams together.
Load	Front-Loading	FS200's front loading feature allows it to be placed up against almost any surface including walls, door moldings, etc.
Usage	Edge	Can be used as a perimeter track with any 1/2 inch substrate.
Other	Curvable	Can be easily modified on-site to create curved joints

TECHNICAL CUTAWAY

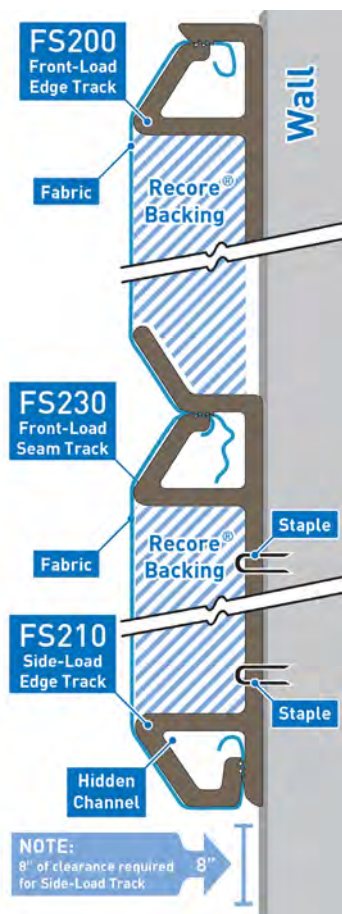

FS200 SPECIFICATIONS

Description	Durable PVC Track for use in Fabric Wall Finishing
Sold In	5' Lengths
Installation	Mountable with <ul style="list-style-type: none"> • Drywall Screws • 18 Gauge 1/4" Full-Crown Staples • Adhesive
Customization	Easily cut with: <ul style="list-style-type: none"> • FS830-001 Chamfer Cutter Tool • 180 Tooth 10" Plastic Weight Chop Saw
Composition	100 % Durable PVC
Dimensions	5' x 0.5" x 0.75"
Weight	0.56 lb per 5' stick
Disposal	Fully Recyclable
Handling	Safe To Handle
Fire Rating	ASTM E84 Class A
VOC's	< 0.1%